

# DUBLIN NORTH

## CITY OF COLORADO SPRINGS

### HISTORIC DRAINAGE MAP

JUNE 2006



**EXISTING BASIN SUMMARY**


BASIN	ACRES	Q5 CFS	Q100 CFS
OS-1*	8.18	11.1	23.6
OS-2*	1.93	5.4	10.5
EX-A*	18.06	24.6	52.6
EX-B*	0.58	0.8	1.7
EX-C*	10.61	17.7	35.8
EX-D	1.27	1.5	3.3
EX-E1	0.82	0.7	1.6
EX-E2	2.17	2.2	5.1
EX-F	3.69	3.7	8.4
EX-G	4.87	5.5	12.7

\* COMPOSITE C INFORMATION TAKEN FROM "MASTER DEVELOPMENT DRAINAGE PLAN AMENDMENT NO. II FOR THE EASTERLY PORTION OF RIDGEVIEW SUBDIVISION AND PRELIMINARY DRAINAGE REPORT FOR THE NORTHEASTERLY PORTION OF RIDGEVIEW SUBDIVISION AND PHASE II SAND CREEK CHANNEL IMPROVEMENTS." BASIN OS-1, EX-A & EX-B CORRESPOND TO OS-145-2 FROM MDDP. BASIN EX-C CORRESPONDS TO OS-145-1 FROM MDDP. BASIN OS-2 IS PART OF BASIN OS-145-3 OF THE MDDP.

**EXISTING DESIGN POINT SUMMARY**

DP	Q5 CFS	Q100 CFS
EX-1	35.5	75.7
EX-2	5.2	9.3
EX-3	17.7	35.8
EX-4	1.5	3.3
EX-5A	0.7	1.6
EX-5B	2.2	5.1
EX-6	3.7	8.4
EX-7	5.5	12.7
EX-8	8.7	19.6

- LEGEND**
- 10' EX CONTOUR      - - - - - 6810 - - - - -
  - 2' EX CONTOUR      - - - - - 6802 - - - - -
  - PROPOSED FLOW DIRECTION      →
  - BASIN BOUNDARY      - - - - -
  - TIME OF CONCENTRATION      - - - - -
  - BASIN ID      \_\_\_\_\_
  - ACREAGE      \_\_\_\_\_
  - DESIGN POINT      \_\_\_\_\_

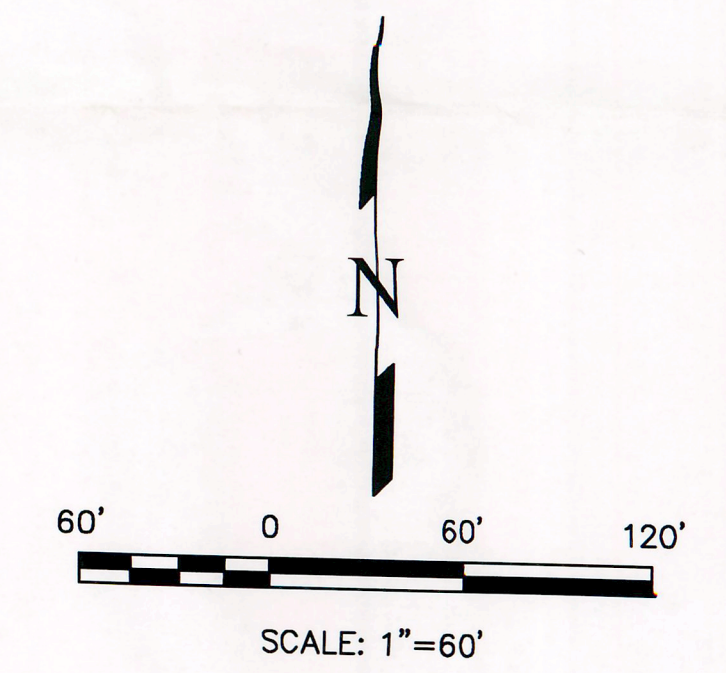

DUBLIN NORTH  
 SHEET NO. 1  
 DATE: 6/1/06  
 DRAWN BY: [unclear]  
 CHECKED BY: [unclear]